

# arbofix<sup>®</sup>

tree securing device

The taproot of iron

... planting is so easy

## arbofix handling with a light rootball


1. Approach special scenes for plant tree row position.

2. Probe the middle of the planting hole with a seed iron.

3. Drive in the arbofix with the mallet.

4. Lift with the rootball hook, straightening the tree and lower down. Fill up the planting hole and water.

**Done.**

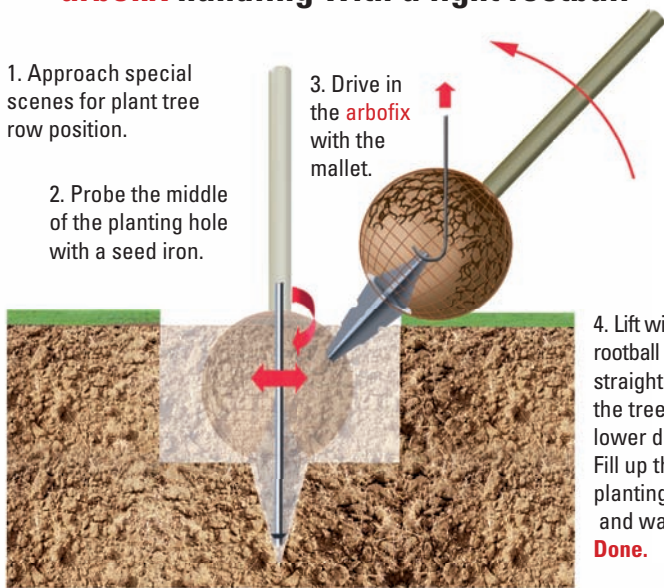

# arbofix handling with a heavy rootball

If working without a special technical **equipment**, like e.g. a three-dimensional bale grabber.


2. Dig out a long hole with a hoe. Width and depth slightly more than **arbofix**.

1. Lifting or rolling down the ramp into the planting hole.

3. Drive in the **arbofix** with the mallet.

4. Erecting

5. Fill up the planting hole with substrate and water. **Done.**

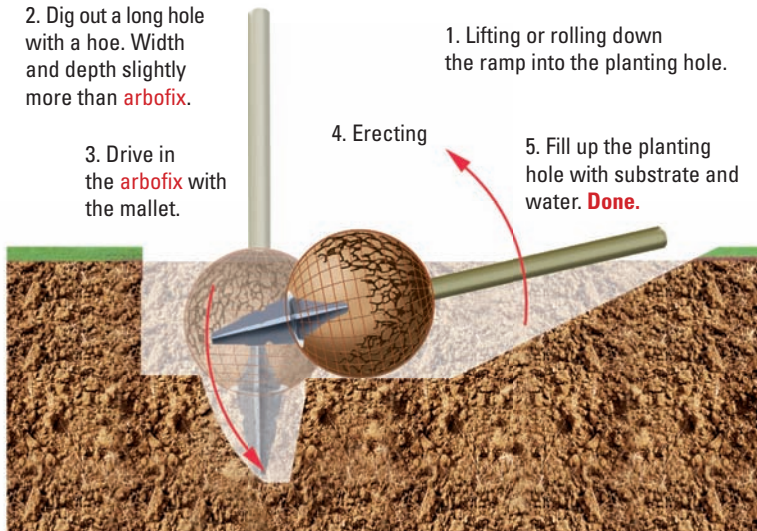

A closed rootball with wire and jute is part of the anchoring principle. It improves verifiable a good root formation and growth. Afterwards regular watering. Thus **arbofix** retains in every substrate and ground.



**arboa**  
tree safety



[www.arboa.com](http://www.arboa.com)